


# Reference Schematics


## TSCS25x

### 40-pin QFN Package

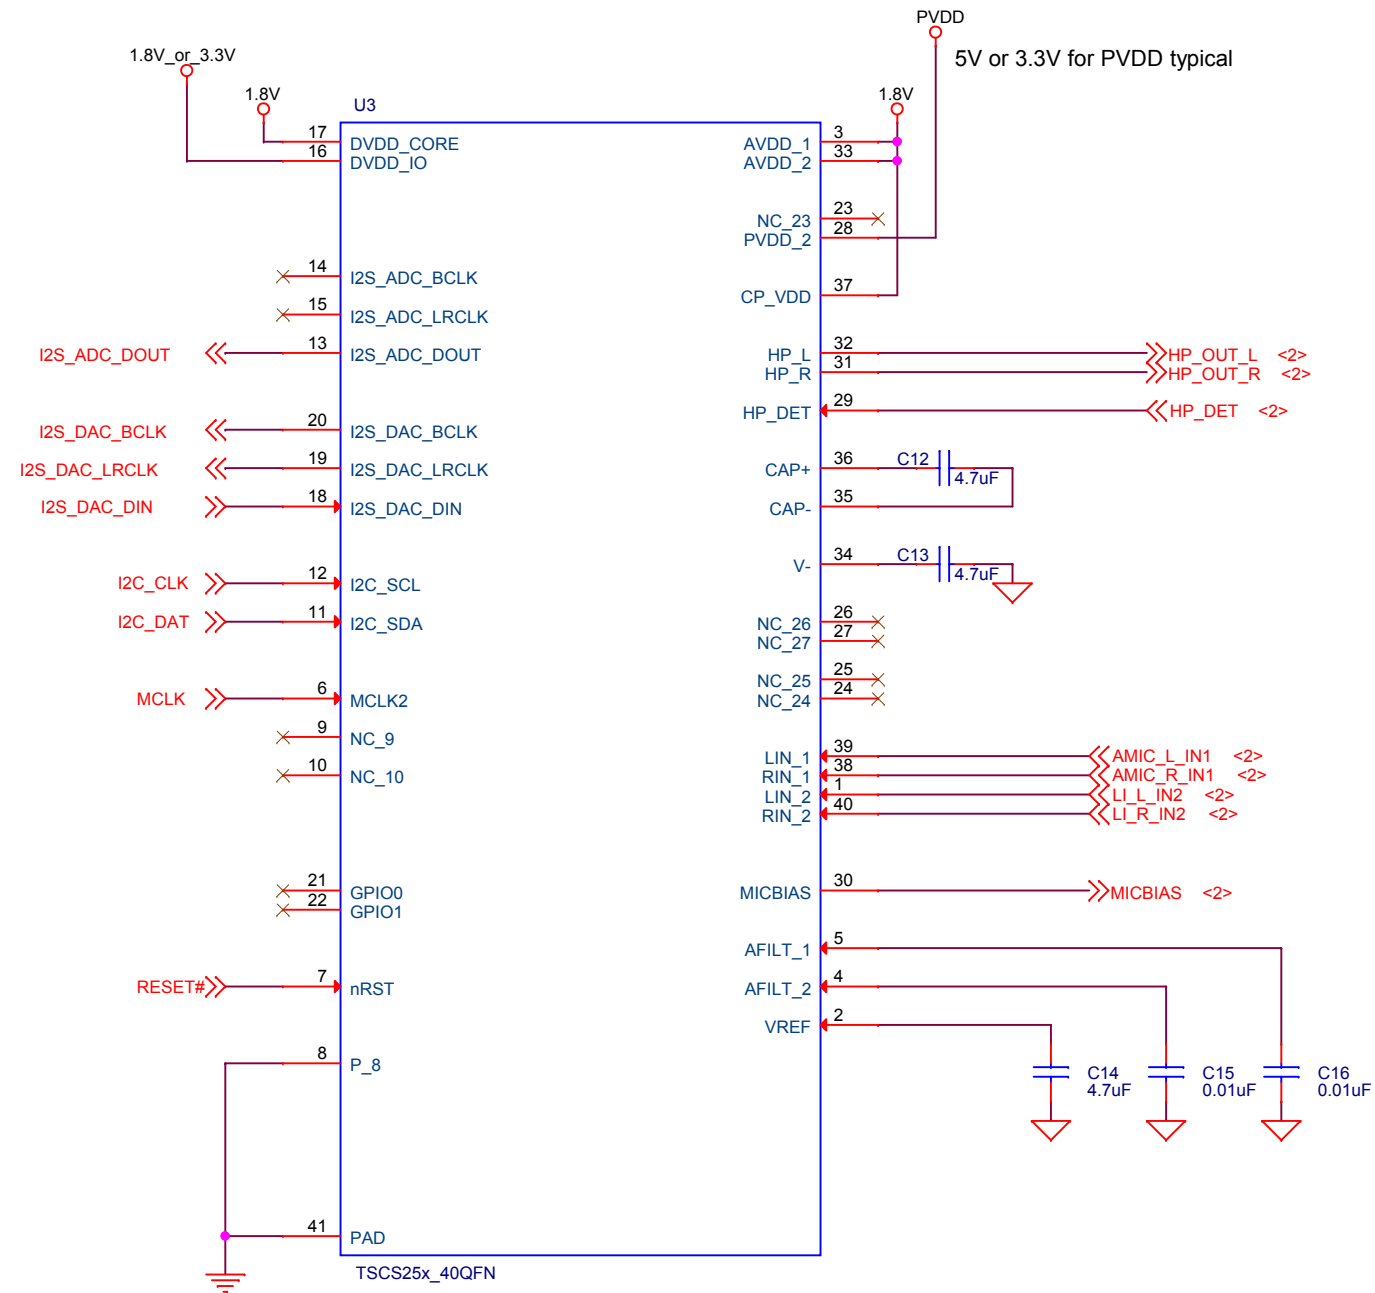


Note: DGND and AGND must be shorted directly under the codec on the internal GND plane with a 20mil copper shunt.


Place on DGND near DVDD

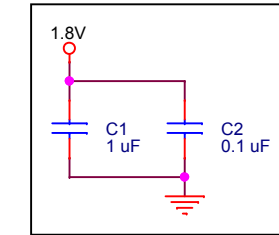


Place on DGND near PLL

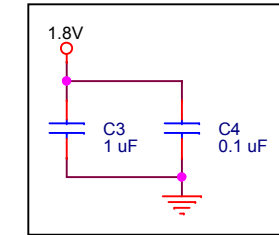



Place on AGND near AVDD

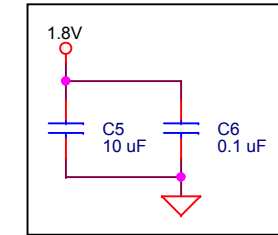

Place on DGND near DVDD\_IO





Place on DGND near PVDD

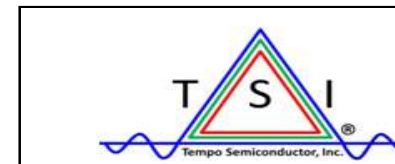



Tempo Semiconductor, Inc.  
 8627 N. Mopac Expy.  
 Suite 130  
 Austin, TX 78759  
 tel: (512) 827-3440  
 fax: (512) 318-2478

Title <b>TSCS25x Reference Schematics</b>			Consumer Audio
Size Custom A	Rev A	Document Number TSCS25x Codec	
Date: Friday, September 16, 2016			Sheet 1 of 2

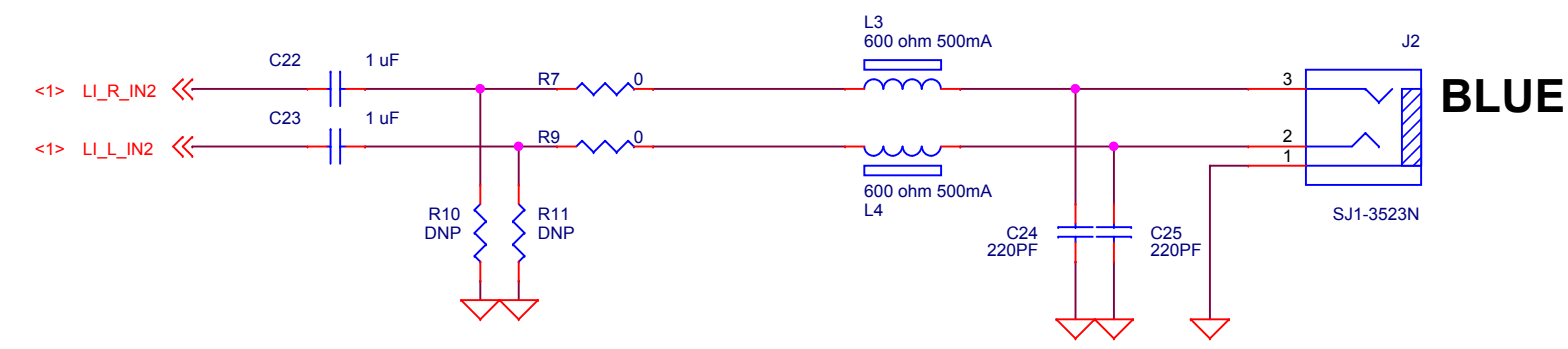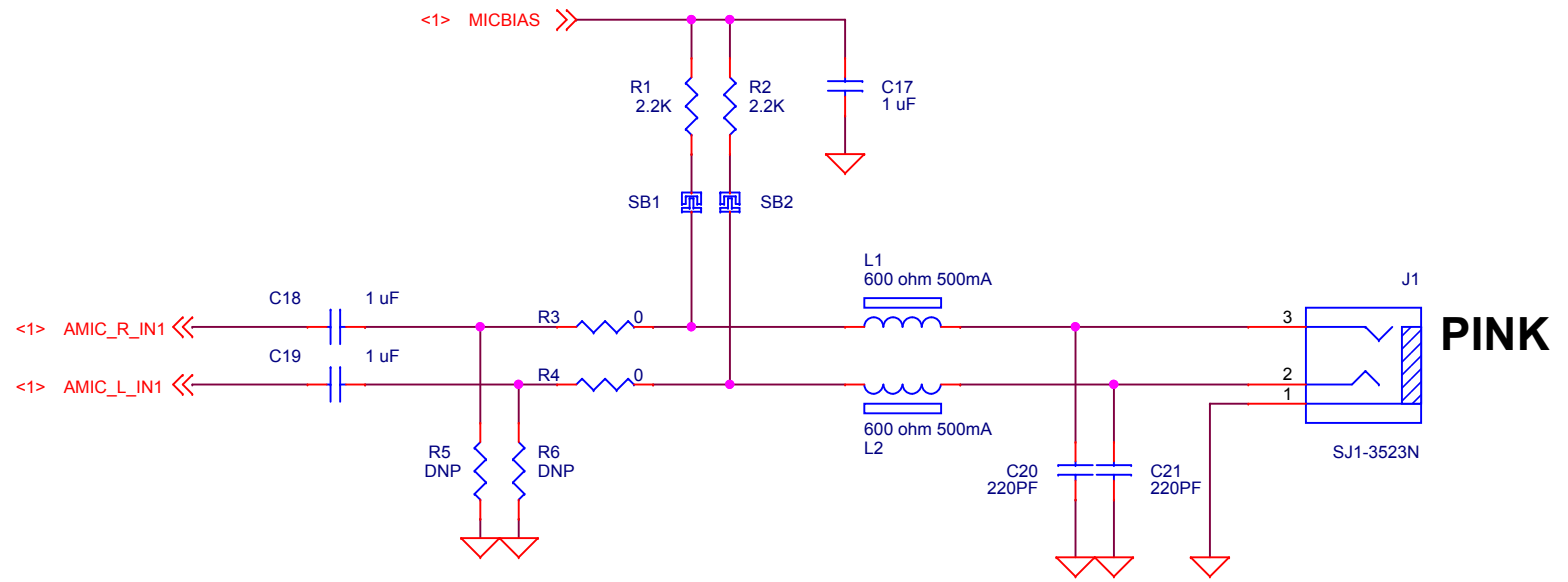

# Headphone

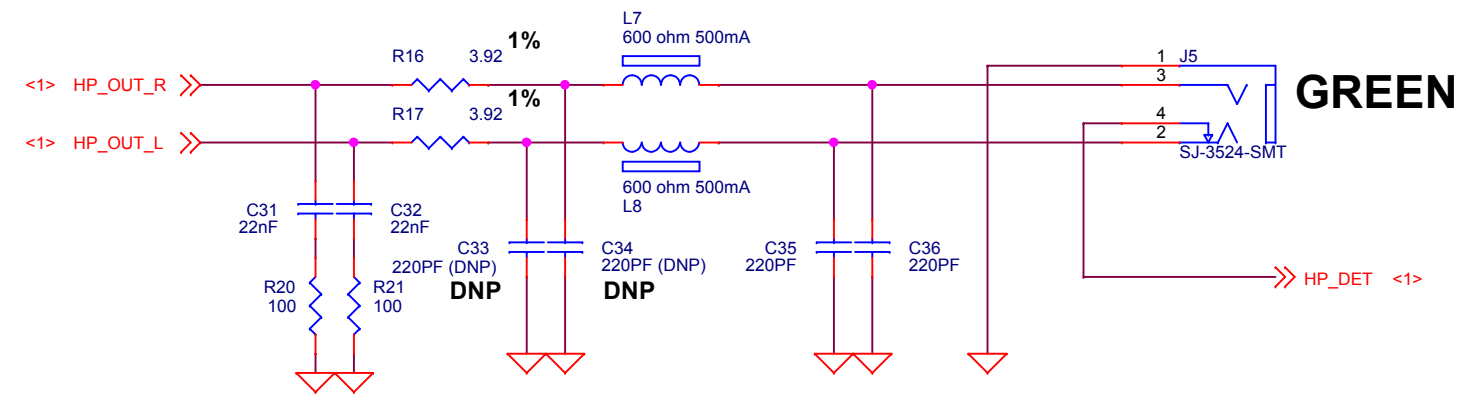

		<b>Tempo Semiconductor, Inc.</b> 8627 N. Mopac Expy. Suite 130 Austin, TX 78759 tel: (512) 827-3440 fax: (512) 318-2478	
		Title <b>TSCS25x Reference Schematics</b>	
Size Custom A	Rev A	Document Number Audio Input and Output Jacks	Consumer Audio
Date: Friday, September 16, 2016		Sheet 2 of 2	